


PL364CX

Dishwashers, Universale, Partially-integrated built-in, 60 cm, Number of place settings: 13, Stainless steel, C

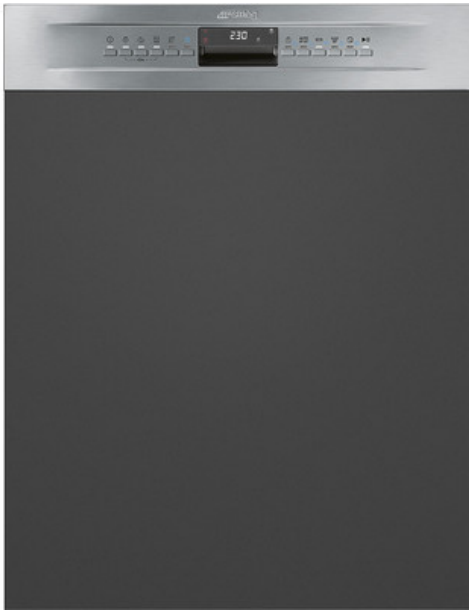

TYPE

Product Family: Dishwashers • Commercial height: 82 cm • Number of place settings: 13 • Installation: Partially-integrated built-in • Commercial width: 60 cm • Kitchen panel: Not supplied • EAN code: 8017709307134

AESTHETICS

Color: Stainless steel • Finishing: Fingerproof • Aesthetics: Universale • Front panel colour: Finger friendly stainless steel • Door type: Without frame • LED/display colour: White • Buttons colour: Silver (oropal grey)

PROGRAMME / FUNCTIONS

N. of programmes: 10+1 • Soak: Yes • Express 27': Yes • Full express - 60 minutes: Yes • ECO: Yes • Quiet (-2 dB): Yes • Auto sensor 45-65: Yes • Mix: Yes • Intense: Yes • Hygiene 99,9%: Yes • Self clean: Yes • Crystal: Yes • Washing temperatures: 38, 45, 50, 55, 65, 70, 75 °C

OPTIONS

Dry Assist+ option: Yes • Delay timer option: Up to 24 hours • 1/2 load FlexiZone option: Yes • Special programs option: Yes

BASKETS

N° baskets: 3, FlexiDuo • Basket colour: Grey • Basket components colour: Grey • Handle: In plastic on upper and lower basket • Upper Basket: With central fixed racks • Glass holder: Yes • Height adjustment of the upper basket: On three levels (5 cm) • Lower Basket: With 2 foldable racks • Largest loadable dish in upper basket: 19,0 cm • Lower basket with anti-drip inserts: Yes • Largest loadable dish in lower basket: 30,0 cm • Colour Inner Components: Green

TECHNICAL FEATURES

Controls: Electronic • Display: Delayed start, Programme time indicator, Time to end indication • Door opening system: Yes • Display type: LED display (3 digit) • On/off indicator: Yes • Salt light indicator: Light • Rinse aid indicator: Light • Progress indicator: Yes • End of cycle indicator: Acoustic signal • Washing system: Orbital • Drying system: Natural condenser drying, with Dry Assist + automatic door opening system at the end of the cycle • Motor: Inverter 2.0 • Third spray arm: Single • Water softener: With electronic setting • Turbidity sensor Aquatest: Yes • Flood protection system: Total Acquastop • Water supply: Single; cold/hot water max. 60°C - energysave with hot water up to 35% • Max water hardness: 100°FH;58°dH • Steam protection: In plastic • Tub material: Stainless steel • Filter: Stainless steel • Concealed heating element: Yes • Min. and max plinth height: 100 - 215 mm • Hinges: Self balancing with fixed hinges • Adjustable feet: 7cm, from 820 to 890 mm • Back feet adjustable from front: Yes

PERFORMANCE / ENERGY LABEL NEW 2019

Energy Efficiency Class: C • Energy consumption [per 100 cycles, based on the eco programme]: 73 kWh • Rated capacity (ps): 13 • Water consumption [per cycle]: 9.0 litres • Programme duration: 4:25 h:min • Airborne acoustical noise emissions: 46 dB(A) re 1 pW • Airborne acoustical noise emission class: C • Energy efficiency Index (EEI): 43.8

ELECTRICAL CONNECTION

Connected power: 1800 W • Voltage: 220-240 V • Type of connection: Single-phase • Frequency (Hz): 50 Hz • Power supply cable length: 140 cm

FEATURES ATTRIBUTES

Noise level: 45 - 47 dB(A)

LOGISTIC INFORMATION

Dimensions of the product HxWxD (mm): 818x598x570 • Net weight (kg): 43.000 kg

OPTIONAL

KITPLV2: Extension kit, DishwashersKITPL60FABB: Plinth Kit, DishwashersKITPL60FABN: Plinth Kit, DishwashersKITPL60FABX: Plinth Kit, DishwashersKITGH: Glass holder kit, Dishwashers

